

REMARKS

Upon review of the formal drawings filed March 1, 2002, a discrepancy between the drawing as filed and the formal drawing has been observed. The correction is marked in red on the enclosed FIG. 4, and a corrected substitute drawing is enclosed herewith, thereby bringing the recently submitted FIG. 4 into conformance with FIG. 4 as originally filed. Please acknowledge acceptance of corrected FIG. 4.

The specification has been amended at page 4, line 31 to correct a grammatical error.

The specification has been amended at page 5, line 31, to correct typographical errors.

Respectfully submitted,

Date

4/29/02

Gregory A. Bruns

Gregory A. Bruns, Reg. No. 33,656
4612 Bruce Ave. So
Edina, MN 55424-1123
Phone 952/926-0862
E-Mail: gabruns@twincitizen.net

VERSION WITH MARKINGS TO SHOW CHANGES MADE



IN THE SPECIFICATION

Page 4, the paragraph beginning at line 31, is shown below in marked-up form:

Applying a voltage to the epi layer may be accomplished with [provide] various configurations:

Page 5, the paragraph beginning at line 31, is shown below in marked-up form:

Then: $R2 = 10(1-3/5) = 4 \text{ K OHMS}$ and $R1 = [10\text{K}-R2 - 6\text{K OHMS}]$ $10\text{K}-R2 = 6 \text{ K OHMS}$

RECEIVED
MAY 13 2002
TECHNOLOGY CENTER 2800

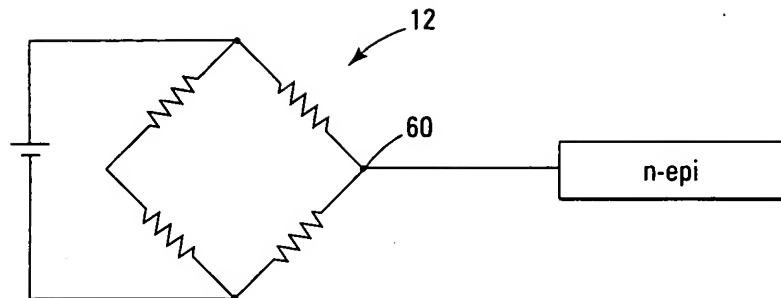


Fig. 3

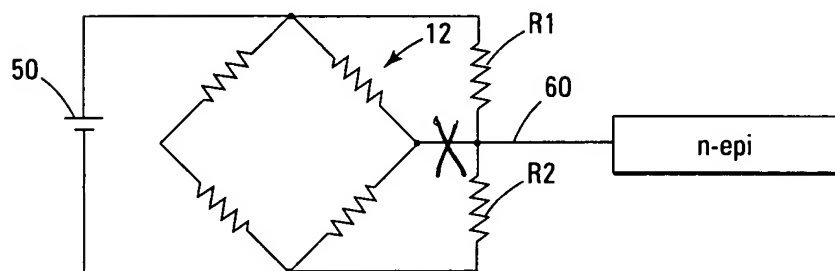


Fig. 4

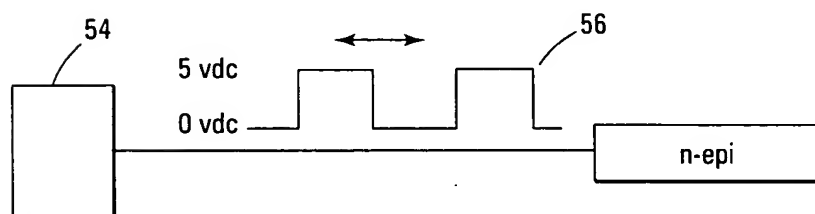


Fig. 5